


Grid:
 ≥ 2,54 mm
 ≥ 100 Mil

Installation Height: 21,3 mm (.839)
Recommended Stroke: 9,3 mm (.366)

Mounting and Functional Dimensions

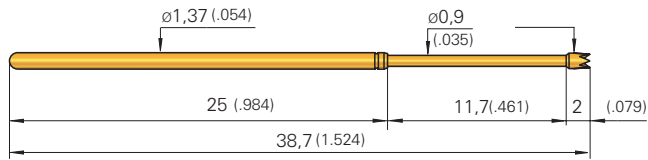


GKS-135

Collar Height and Installation Height

The Installation Height of the Test Probe is determined by the collar height of the Receptacle (KS).

Designation	Installation Height
KS-100 47 05	15,8 mm (.622)
KS-100 47 25	18,3 mm (.720)
KS-100 47 40	19,8 mm (.780)
KS-100 47 (G)	21,3 mm (.839) var.

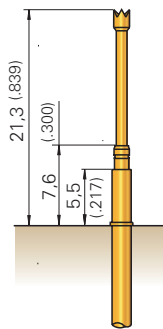

Application example with KS - 100 47

Available Tip Styles

Material	Tip Style	Plating	Further Versions	
			∅	∅ (inch)
2 01		A		
3 02		A		
3 03		A		
2 04		A		
3 06		A		
3 06		A		
3 07		A	2,50	(.098)
2 09*		N		
2 14		A		
2 14		A		
2 14		A		
2 25		A		
2 91		A		
2 97		A		

NEW

* Installation Height with KS-100 47: 23,3 mm (.917)
 Maximum Stroke: 11,0 mm (.433)

Mechanical Data

Working Stroke: 9,3 mm (.366)
Maximum Stroke: 11,7 mm (.461)
Spring Force at Work. Stroke: 2,0 N (7.2oz)
alternative: 1,5 N (5.4oz); 3,0 N (10.8oz)

Electrical Data

Current Rating: 5 - 8 A
R_i typical: < 30 mΩ

Materials

Plunger: Steel or BeCu, gold- or nickel-plated
Barrel: Nickel-Silver or Bronze, gold-plated
Spring: Steel, gold-plated

Mounting Hole Size

see Probe series GKS-100, Page 28

Note:

For Test Probes series GKS-135 Receptacles of the series KS-100 are used (see Page 29).

Tools:

Insertion and Extraction Tools for GKS and KS see Page 118.

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)
	2 = Steel 3 = BeCu			A = Gold N = Nickel		

Test Probe:

G K S 1 3 5 2 0 4 1 3 0 A 2 0 0 0

Receptacle:

K S - 1 0 0 4 7