

Grid:
 $\geq 2,54$ mm
 ≥ 100 Mil


NEW

Contact Terminals


for Interfaces and Transfer Fields

Contact Terminals with Collar Height: 3 mm (.118)


KT-254 W-E03 (wire-wrap)




KT-254 W3 E03 (wire-wrap)



KT-254 L-E03 (Solder)




KT-254 L3 E03 (Solder)




KT-120 L3 E02 - 30 (Solder) NEW

High-current Contact Terminal




KT-150 L3 E03 - M3 (Solder) NEW

High-current Contact Terminal




Contact Terminals with Collar Height: 2 mm (.079)


KT-254 W-E02 (wire-wrap)




KT-254 W3 E02 (wire-wrap)




KT-254 L-E02 (Solder)




KT-254 L3 E02 (Solder)



KT-254 L3 E02 - 30 (Solder Connection)




KT-254 W-PL (wire-wrap)



Other Contact Terminals:


KT-254 W3 E12 (wire-wrap)

For assembly in INGUN-ZSK Transfer Field (ZSK = Top-side Contacting Unit)

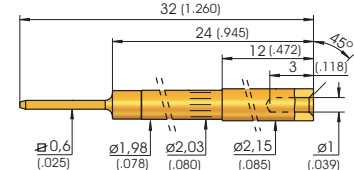


KT-158 02 (Order No. 9408)

Contacting Terminal for GenRad Interface




KT-158 (Order No. 3650)

Contacting Terminal for Zehntel Interface

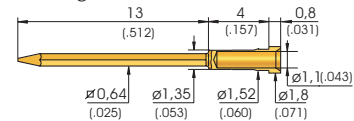


KT-158 06 (Order No. 21814) NEW

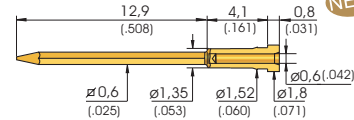


KT-586 102 400 R

Contacting Terminals for general usage




KT-279 102 300 (to solder in)



KT-112 143 215 E02 (Replaceable)

Will be used with KS-112, see Page 50)



Mounting Hole Size *

for KT-254:

in CEM1 \varnothing 1,98 - 2,00 mm (.0780-.0787)

in FR4 \varnothing 1,98 - 1,99 mm (.0780-.0783)

for KT-158:

in CEM1 and FR4 \varnothing 1,40 mm (.0551)

for KT-586:

in CEM1 and FR4 \varnothing 2,55 - 2,57 mm (.1004-.1012)

for KT-120:

in CEM1 and FR4 \varnothing 3,00 - 3,02 mm (.1181 - .1189)

for KT-150:

in CEM1 and FR4 \varnothing 4,00 - 4,02 mm (.1575 - .1583)

* Services:

Customized Contact Blocks drilled according to customer demands (and matching certain INGUN Receptacles) are available from INGUN.

Electrical Data

R_i typical: < 5 m Ω

Materials

Contact Terminals: Brass, gold-plated
 KT-586: Brass, rhodium-plated

Collar Height and Install. Height for KT-254

The Installation Height of the Contact Terminals is determined by the collar Height.