




Grid:
 ≥ 3,50 mm
 ≥ 140 Mil

Installation Height: 5,5 mm (.217)
 Recommended Stroke: 6,0 mm (.236)



Mounting and Functional Dimensions

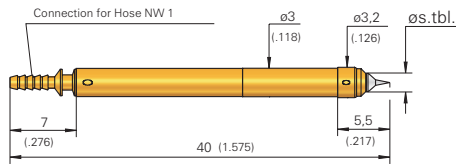

PKS-300 Type A

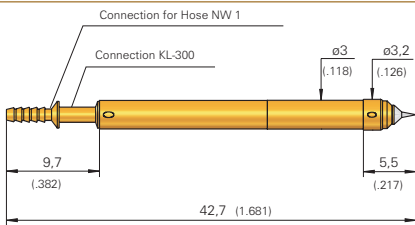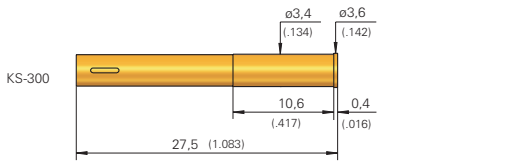

PKS-300 Type B

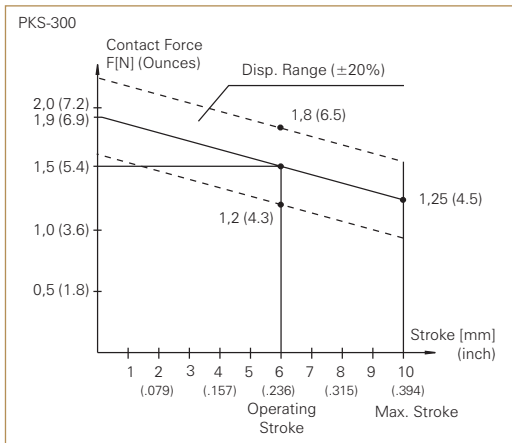

Available Tip Styles

Material	Tip Style	Tip Diameter	Plating	Further Versions	
				Ø	Ø (inch)
2	01**	Ø 2,00 (.079)	R		
2	04**	Ø 1,30 (.051)	R	2,00	(.079)
2	05**	Ø 2,50 (.098)	R	1,30	(.051)
2	06**	Ø 1,30 (.051)	A	2,50	(.098)
2	15*	Ø 2,00 (.079)	A		
2	33**	Ø 1,30 (.051)	A		
2	91**	Ø 1,30 (.051)	A		

* pressed-in HM-Tip, Installation Height 6,5 mm (.256)
 ** Collar Diameter: 2,0 mm (.079)

Warning:
 Do not solder the cable to the crimp points of the Receptacle.

Note:
 For High-Current Applications up to 10 A, order with Special Designation „AH“ (Terminal „A“) resp. „BH“ (Terminal „B“).

Note:
 The Receptacle can be used from Grid 4,00 mm (160 Mil) up.

Note:
 Pneumatic Accessories and general Instructions see Page 94/95.

***** Note:**
 Tip 15, 01, 91 F = 1,1 N (4.0oz)
 Tip 04, 05, 06, 33 F = 1,5 N (5.4oz)

Mechanical Data

Working Stroke: 6,0 mm (.236)
Maximum Stroke: 10,0 mm (.394)
Contact Force at Work.Stroke: 1,1 N (4.0oz) or 1,5 N (5.4oz)
Operating Medium: Compressed Air (filtered, oil-free)
Operating Pressure: 6 bar (86 psi)

Materials

Plunger: Steel, rhodium- or gold-plated
Barrel: Brass, gold-plated
Restoring Spring: Steel, gold-plated
Receptacle: Brass, gold-plated
O-Rings: Perbunan

Electrical Data

Current Rating: 2 - 3 A (up to 10 A see Note below)
R_i typisch: < 30 mΩ

Mounting Hole Size

with Receptacle: Ø 3,38 - 3,39 mm (.1331 - .1335)
without Receptacle: Ø 3,00 mm (.1181)

Ordering Example

Series	Tip Material	Tip Style	Tip Diameter (1/100 mm)	Plating	Spring Force (dN)	Collar Height (mm)	Type (alternative AH, B, BH)
PKS	2 = Steel	01	2,00	A = Gold R = Rhodium	1,1	0,2	A

Test Probe:

PKS 300 2 01 200 R 11 02 A

Test Probe for usage up to 10 A:

PKS 300 2 06 130 R 15 02 AH

Receptacle for PKS-300:

KS - 300

Clip Connection with Solder Terminal for Series 300:

KL - 300