

Screw-in Tools with a system

Drawings to Screw-in and Bit-Tools see on Page 171.
Drawings to Insertion Tools see on Page 118.

NEW

NEW

NEW

NEW


NEW

NEW


Series	Plunger Tip-Ø	Bit-Tool	Ø A (mm)	Ø B (mm)	C (mm)	T pre-set	Torque Key			Torque		Insertion Tools for Receptacles
							freely adjustable	min.	max.			
GKS-050 M	≤ 1,1 mm	BIT-GKS-050 M-B	1,5	5	30	DW-1	-	-	0,5 Ncm	1 Ncm	SW-KS-080	
GKS-075 M	≤ 1,1 mm	BIT-GKS-075 M-B	2,3	5	30	DW-1	-	-	0,5 Ncm	1 Ncm	SW-KS-075 G	
GKS-075 M	≤ 1,5 mm	BIT-GKS-075 M	2,3	5	30	DW-1	-	-	0,5 Ncm	1 Ncm	SW-KS-075 G	
GKS-087 M	≤ 1,1 mm	BIT-GKS-050 M-B	1,5	5	30	DW-1	-	-	0,5 Ncm	1 Ncm	SW-KS-050 G	
GKS-098 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-GKS	
GKS-103 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
GKS-103 M	≤ 4,1 mm	BIT-GKS-503 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
GKS-112 FP	≤ 2,0 mm	BIT-GKS-112 M-B-FP	2,8	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
GKS-112 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
GKS-112 M	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
GKS-113 M	≤ 3,0 mm	BIT-GKS-113 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
GKS-113 M	≤ 4,2 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
GKS-204 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
GKS-212 M	≤ 2,0 mm	BIT-GKS-212 M-B	2,7	6	26	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-GKS	
GKS-313 M	≤ 3,0 mm	BIT-GKS-113 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
GKS-427 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
GKS-500 M	> 0 mm	BIT-GKS-500 M	3,5	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-GKS	
GKS-503 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
GKS-503 M	≤ 4,1 mm	BIT-GKS-503 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
GKS-746 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
GKS-747 M	≤ 4,0 mm	BIT-GKS-747 M	5	6	28	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-112	
GKS-761 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-GKS	
GKS-803 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
GKS-803 M	≤ 4,1 mm	BIT-GKS-503 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
GKS-854 M	≤ 4,0 mm	BIT-HSS-150 M	5,5	6	28	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-GKS	
GKS-899 M	≤ 1,5 mm	BIT-GKS-899 M-B	2,4	5	30	DW-3	-	-	2 Ncm	3 Ncm	SW-KS-100	
GKS-899 M	≤ 2,0 mm	BIT-GKS-899 M	2,8	6	27	DW-3	-	-	2 Ncm	3 Ncm	SW-KS-100	
GKS-913 M	≤ 3,0 mm	BIT-GKS-913 M-B	4,8	4,8	-	DW-5	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-113	
GKS-913 M	≤ 3,6 mm	BIT-GKS-913 M	5,3	6	27	DW-5	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-113	
GKS-967 M	≤ 1,3 mm	* BIT-GKS-967 M-B-K	5,3	5,3	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-GKS	
HSS-118 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
HSS-118 M	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
HSS-120 M	≤ 3,0 mm	BIT-GKS-113 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
HSS-120 M	≤ 4,2 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
HSS-150 M	≤ 3,0 mm	BIT-HSS-150 M-300	5,5	6	28	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-GKS	
HSS-150 M	≤ 4,0 mm	BIT-HSS-150 M	5,5	6	28	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-GKS	
HSS-520 M	≤ 3,0 mm	BIT-GKS-913 M-B	4,8	4,8	-	DW-5	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-113	
HSS-520 M	≤ 3,6 mm	BIT-GKS-913	5,3	6	27	DW-5	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-113	
HSS-827 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
PKS-171 M	≤ 1,6 mm	BIT-PKS-171 M-B	2,7	6	26	DW-3	-	-	2 Ncm	3 Ncm	SW-KS-112	
PKS-355 M	≤ 2,5 mm	BIT-SKS-465 M-B	4	4	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
PKS-388 M	≤ 3,7 mm	BIT-PKS-388 M-B	5	6	30	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-112	
PSK-350 M	≤ 2,5 mm	BIT-SKS-465 M-B	4	4	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113	
SKS-215 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
SKS-215 M	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112	
SKS-435 M	≤ 3,1 mm	BIT-GKS-503 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
SKS-435 M	≤ 4,1 mm	BIT-GKS-503 M	5,5	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-103	
SKS-465 MF	≤ 2,5 mm	BIT-SKS-465 M-B	4	-	-	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-113	
SKS-465 MF	≤ 3,0 mm	BIT-SKS-465 M	4	6	27	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-113	
SKS-465 SF	> 0 mm	BIT-SKS-465 SF	3	6	28	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-113	

Screw-in Tools with a system




Series	Plunger Tip-Ø	Bit Tool	Ø A (mm)	Ø B (mm)	C (mm)	Torque Key			Torque		Insertion Tools for Receptacles
						pre-set	freely adjustable		min.	max.	
T-112 M	≤ 2,0 mm	BIT-GKS-112 M-B	2,7	5	30	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112
T-112 M	≤ 3,5 mm	BIT-GKS-112 M	4,3	6	27	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112
T-113 M	≤ 3,0 mm	BIT-GKS-113 M-B	4,8	4,8	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
T-113 M	≤ 4,2 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
T-113 M	≤ 5,0 mm	BIT-T-113 M	6	-	-	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
NEW T-888 M	3,0 - 4,0 mm	BIT-T-888 M-3	3,5	6	23	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
NEW T-888 M	4,0 - 4,7 mm	BIT-T-888 M	5	6	23	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
NEW T-888 M	5,0 mm	BIT-T-912 M	2,6	6	23	DW-20	DW-5-40	DW-20-120	10 Ncm	20 Ncm	SW-KS-113
T-899 M	≤ 1,5 mm	BIT-GKS-899 M-B	2,4	5	30	DW-3	-	-	2 Ncm	3 Ncm	SW-KS-100
NEW T-912 M	2,0 - 3,5 mm	BIT-T-912 M	2,6	6	23	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-KS-112
VF-3	≤ 2,1 mm	BIT-VF3 M-B	3,3	5	29	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-GKS
VF-3	≤ 3,0 mm	BIT-VF3 M	4	6	27	DW-5	DW-5-40	-	3 Ncm	5 Ncm	SW-GKS
VF-4	≤ 2,5 mm	BIT-SKS-465 M-B	4	4	-	-	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-103
VF-4	≤ 3,0 mm	BIT-SKS-465 M	4	6	27	-	DW-5-40	-	5 Ncm	10 Ncm	SW-KS-103
VF-5	≤ 3,0 mm	BIT-GKS-113 M	5,3	6	27	DW-20	DW-5-40	DW-20-120	5 Ncm	20 Ncm	on Request

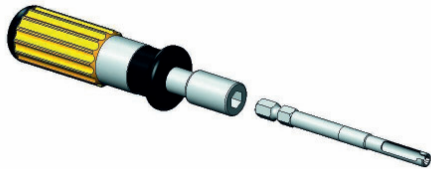

DW-5 with BIT-GKS-113 M



BIT-GKS-113 M with Test Probe GKS 113 M

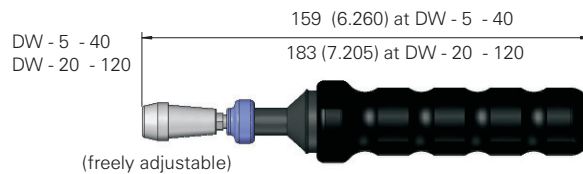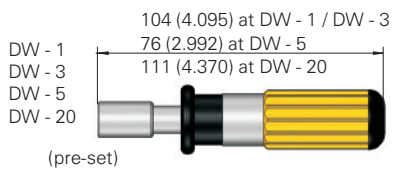

Ordering Example

Bit-tool for screw-in Probe:

Torque keys pre-set:

Torque keys freely adjustable:

BIT - GKS - 112 M - B

DW - 1

DW - 3

DW - 5

DW - 20

DW - 5 - 40

DW - 20 - 120